



FRONT VIEW

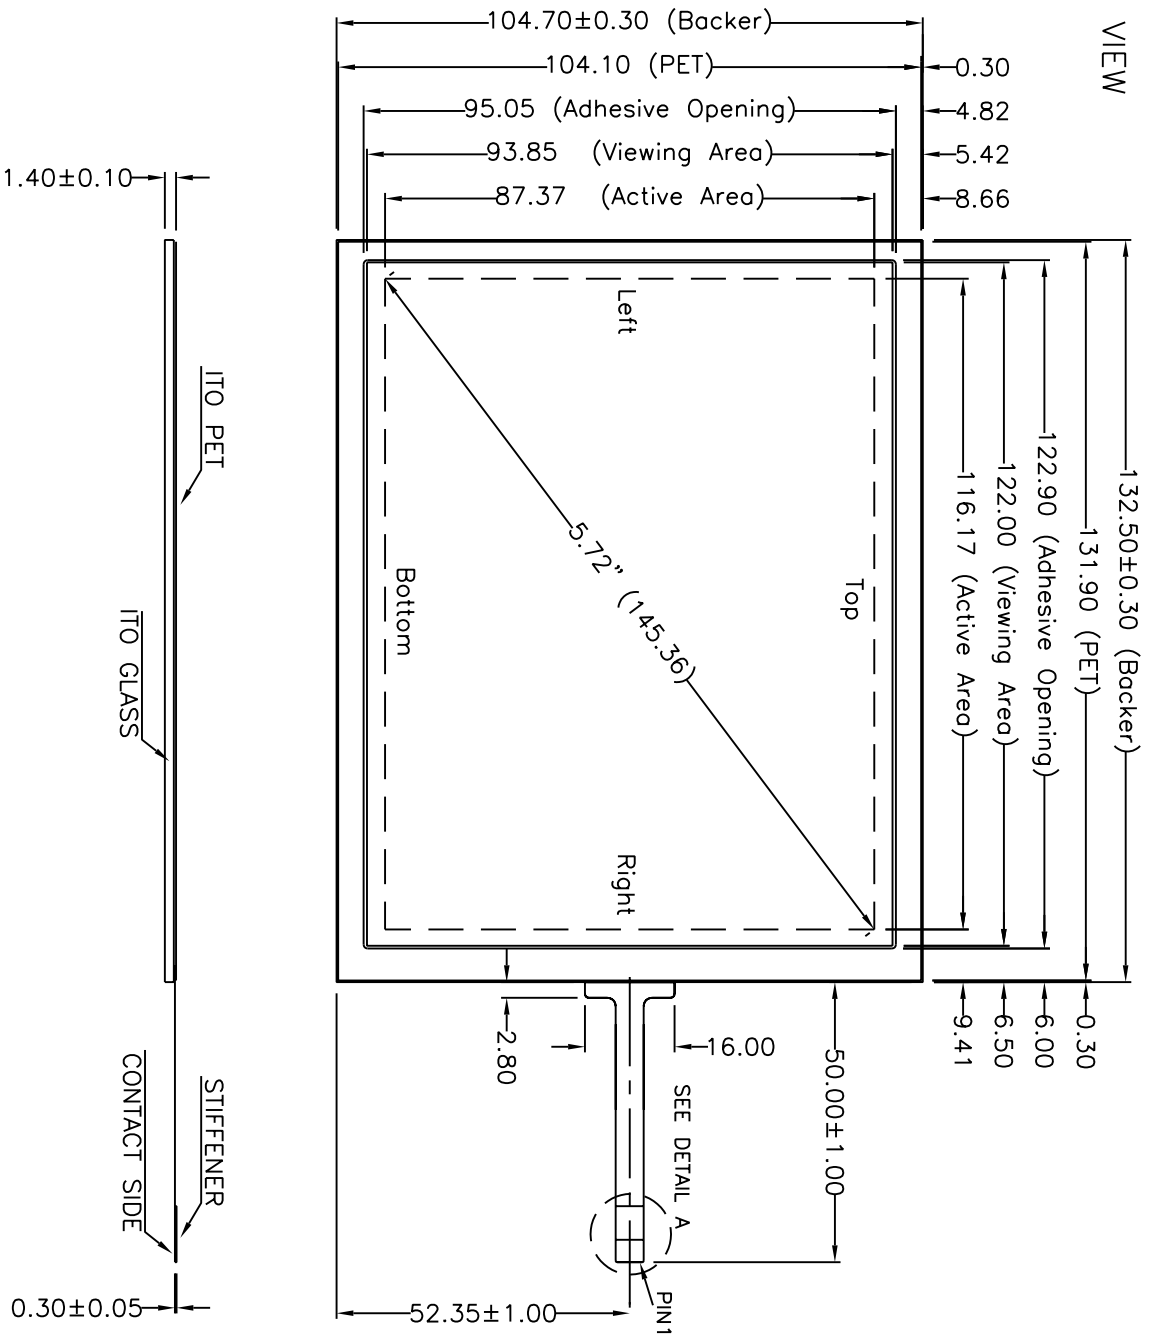

Pin #	Assignment
1	Top
2	Right
3	Bottom
4	Left

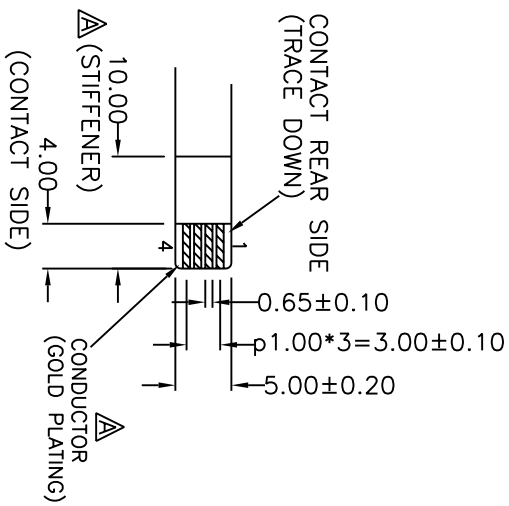

DETAIL A

- NOTES:
1. ITO GLASS THICKNESS : 1.10mm
 2. OVERALL THICKNESS : 1.40±0.10mm
 3. CONNECTOR AND PINOUT AS INDICATED
 4. FRONT SURFACE : ANTI-GLARE HARDCOAT
 5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.30mm
 6. TAIL TYPE : IMMERSION GOLD PLATED FPC , ZIF
 7. OTHER SPEC : SEE APPROVAL SHEET



NO.	DATE	REVISION	DESCRIPTION	CHK
A	MAY 20, 2005	CONDUCTOR GOLD PLATING & STIFFENER LENGTH ADJUST	ALEX	CHK

CHIEF OF DESIGN	APPROVED	DATE	PROJECT MANAGER
	Alex	JAN 20, 2006	

ENGINEER	DATE	REV.	ANGULAR
Jerry		A	

NO.	DATE	DESCRIPTION	CHK
1	OF 1	REV. A	

TOLERANCES UNLESS SPECIFIED	PROJECT NAME
X ± 0.50	9532
.XX ± 0.50	9532-1-011
.XXX ± 0.30	

SCALE:	UNIT:
1:1	mm

Apex Material Technology Corp.