



FRONT VIEW

Pin#	Assignment
1	Top
2	Top sense
3	Bottom sense
4	Bottom
5	Right
6	Right sense
7	Left sense
8	Left

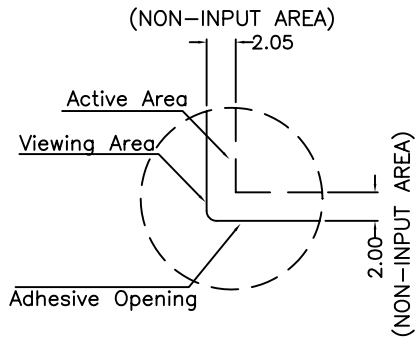

DETAIL A

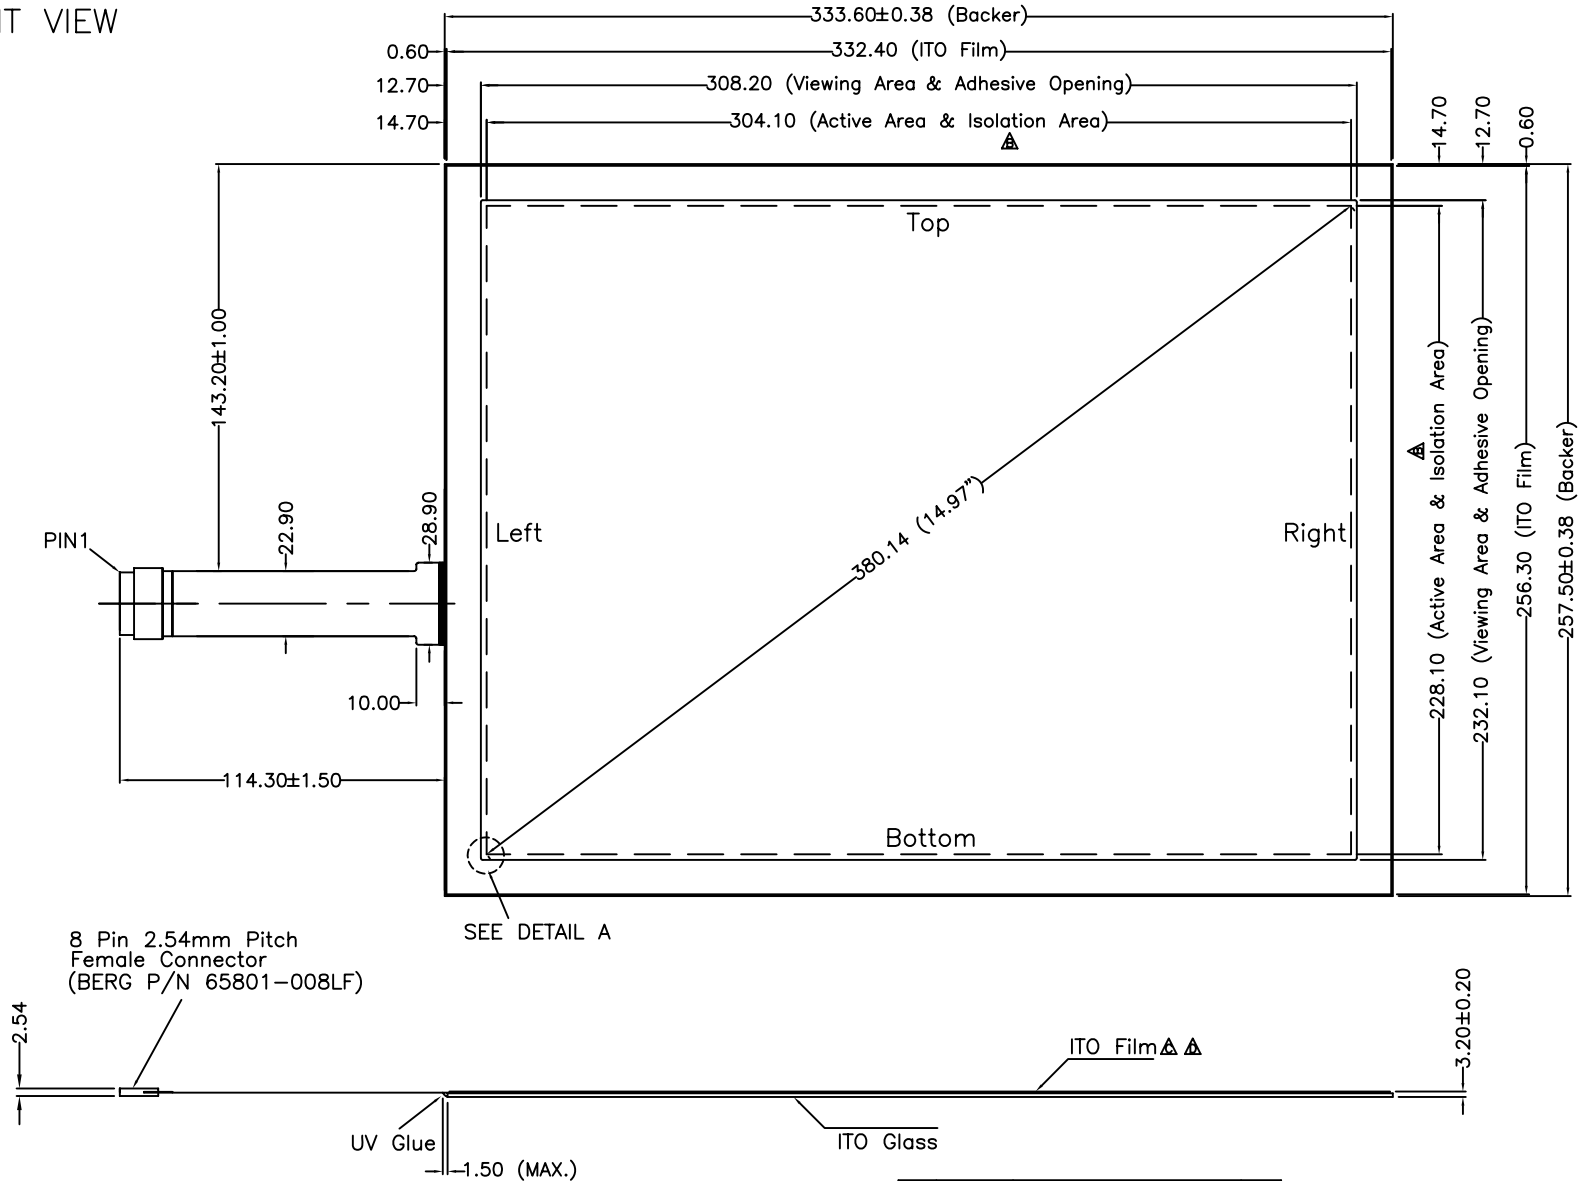

NOTES:

1. ITO GLASS THICKNESS : 2.80mm
2. OVERALL THICKNESS : 3.20±0.20mm
3. CONNECTOR AND PINOUT AS INDICATED
4. FRONT SURFACE : ANTI-GLARE HARDCOAT
5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
6. TAIL TYPE : TIN PLATED FPC WITH BERG CONNECTOR
7. CONNECTOR : BERG P/N 65801-008LF
8. OTHER SPEC : SEE APPROVAL SHEET

NO.	DATE	DESCRIPTION	CHK
D	APR 11, 2008	MODIFY ITO FILM	ALEX
C	OCT 19, 2007	MODIFY ITO FILM	ALEX
B	MAY 21, 2007	ISOLATION AREA MODIFY(FROM REV.0)	ALEX
REVISION			
CHIEF OF DESIGN	APPROVED		Alex
ENGINEER	PROJECT MANAGER		
DRAWN BY	Denise	DATE	APR 22, 2009
SHT	1 OF 1	REV.	D

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED		MODEL NAME :
.X	± 0.50	9546
.XX	± 0.50	DWG NO : 9546-4-011
.XXX	± 0.30	SCALE: 1:1 UNIT: mm
ANGULAR	.	

