


CONNECTOR PINOUT	
PIN NO.	DESIGNATION
1	H
2	X
3	S
4	Y
5	L


THIS DRAWING IS A CONTROLLED DOCUMENT. (P/N) MS500761

TYCO (AMP)
487378-4
OR EQUIVALENT

CABLE
5 POSITION

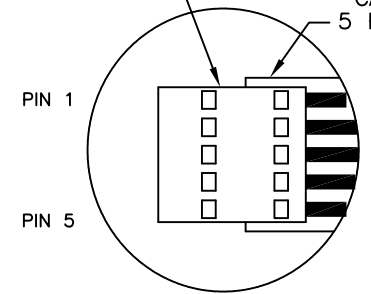

DETAIL A
NTS

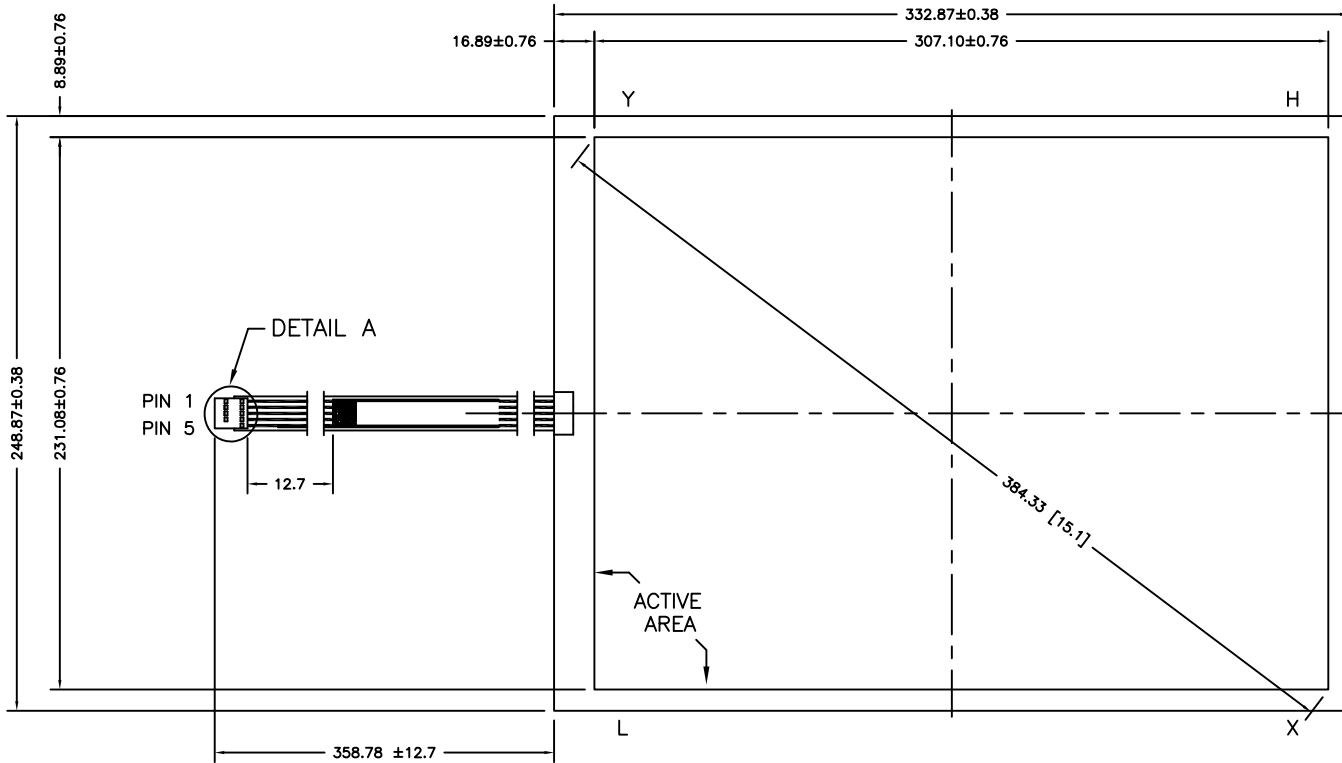

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO ELO TOUCH SOLUTIONS, INC. AND ITS WORKING SUBSIDIARIES. IT MAY NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT PERMISSION FROM ELO TOUCH SOLUTIONS.

- NOTES:
- GLASS THICKNESS 3.18mm NOMINAL.
 - FINISHED PART THICKNESS 3.48 +0.5mm/-0.0mm.

REV	DESCRIPTION	DATE	BY	CHK
C	ECO-12-014006: REBRANDED TO ELO TOUCH SOLUTIONS	8/22/12	BC	SS
B	ECO-11-007278 FINISHED PART THICKNESS 3.48 +0.5mm/-0.0mm.	4/13/11	RB	
A	RELEASE PER ECO 5370	11/2/05		CCB
P	LTR			

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm		0 PLC	± .3
		1 PLC	± .4
		2 PLC	± .2
		3 PLC	± .
		4 PLC	± .
ANGLES:		SURFACE TEXTURE: N/A	

DRN	10/17/05	MATERIAL	ACCUTOUCH	HEAT TREAT	N/A
Q. CHUNG					N/A
CHK					
APVD	10/17/05				
Q. CHUNG		DIMENSIONAL DRAWING SCN-AT-FLT15.0-Z01-0H1-R			
SCALE	1:1	SIZE	A2	DRAWING NO.	MS500761
SHEET	1	OF	1	REV	C

LOC 08
DIST 08