



0.188mm ITO Film
1.8mm ITO Glass


PIN	OUT
1	UR
2	LR
3	COMMON
4	LL
5	UL



Notes:

- 1.Type:Film to Glass
- 2.Operating Voltage:≤10V
- 3.Operation Temperature:-10℃~60℃
Storage Temperature:-20℃~70℃
- 4.Life Time:10,000,000 times
- 5.Connect Material:FPC
- 6.Response Time:≤10ms
- 7.Linearity:≤5%
- 8.Transmittance:≥85%
- 9.Surface Hardness≥3H(pencil)
- 10.Operation force:60g~150g
- 11.Resistance:X:200Ω-1000Ω Y:100Ω-600Ω

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
MILLIMETERS
TOLERANCES: ANGLES ±1°
.XX" ±.02"
.XXX" ±.005"
0.Xmm ±0.5mm
OR
0.Xmm ±0.13mm

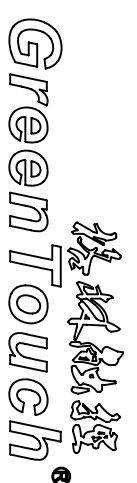

DRAWN BY:005	DATE:10-8-25	DRAWING NO:	REV
CHECKED BY:008	DATE:10-8-27	GT-5W-15.4K-A	B
APPROVED BY:011	DATE:10-9-2	TITLE:	SHEET NO: 1 of 1

